



TL-D Standard Colours

TL-D 18W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Voltage (Nom)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	59 V	
Life to 10% failures (nom.)	10000 h	Controls and Dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Light Technical		Approval and Application	
Colour Code	54-765	Energy efficiency label (EEL)	B
Lamp Luminous Flux 25°C EL (Nom)	1050 lm	Mercury (Hg) content (nom.)	8.0 mg
Colour Designation	Cool Daylight	Energy consumption kWh/1,000 hours	22 kWh
Lumen maintenance 10,000 hours (nom.)	75 %	Product Data	
Lumen maintenance 2,000 hours (nom.)	90 %	Full product code	871150070267840
Lumen maintenance 5,000 hours (nom.)	80 %	Order product name	TL-D 18W/54-765 1SL/25
Colour Temperature, horizontal (Nom)	6200 K	EAN/UPC – product	8711500702678
Colour Rendering Index,horiz (Nom)	72	Order code	928048005436
Operating and Electrical		Numerator – quantity per pack	1
Power (Rated) (Nom)	18.0 W	Numerator – packs per outer box	25
Lamp current (nom.)	0.360 A	SAP material	928048005436
		SAP net weight (piece)	0.070 kg

TL-D Standard Colours

ILCOS code

FD-18/62/2A-E-G13


Dimensional drawing

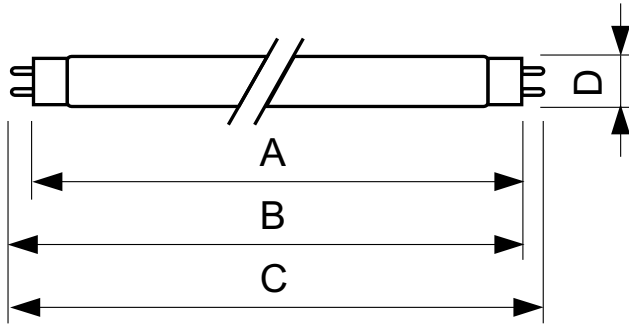


TL-D 18W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/54-765 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Photometric data

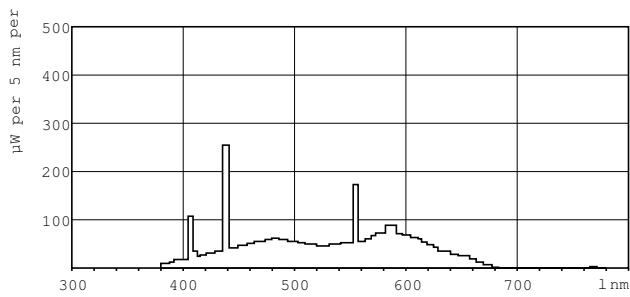


LDPB_TL-DSTD_54-765-Spectral power distribution B/W

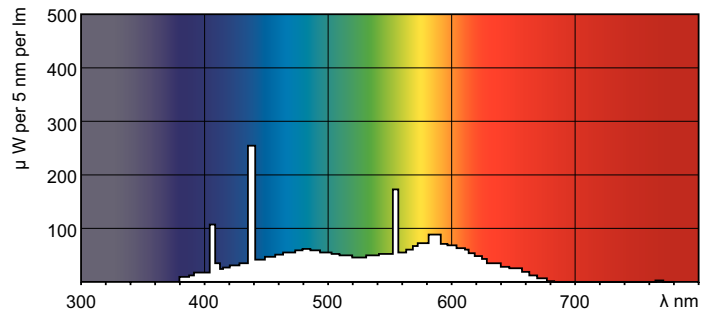


LDPO_TL-DSTD_54-765-Spectral power distribution Colour

Lifetime

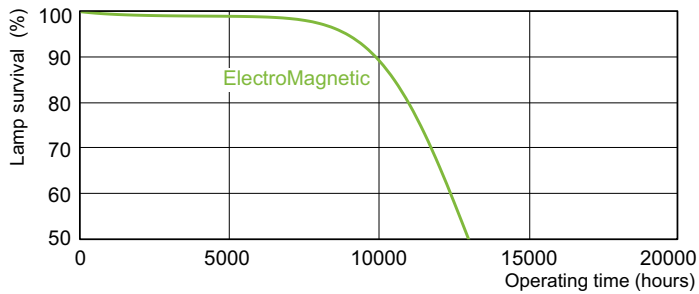

LDLE_TL-DSTD_0001-Life expectancy diagram

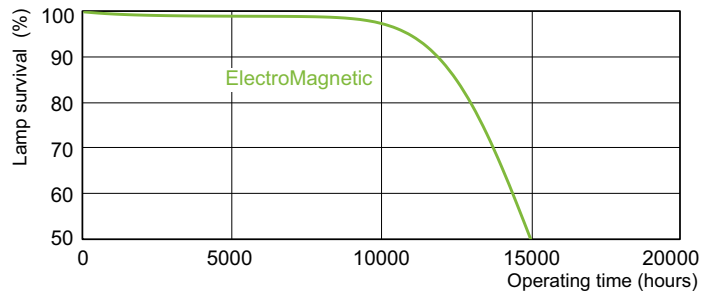

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime



LDLM_TL-DSTD_0001-Lumen maintenance diagram

