



PowerBalance – sustainable performance

PowerBalance RC600B

When it comes to lighting an office space with LED luminaires, people are willing to invest in sustainability, but only at reasonable cost. At the same time, the system should comply with office lighting norms to ensure a comfortable working environment. PowerBalance is an attractively priced LED luminaire specially developed to meet all office requirements. It consumes significantly less energy while offering longer life of the light source, resulting in lower operational cost compared to traditional luminaires.

Benefits

- Operational cost saving
- Energy-efficient
- Office norm-compliant

Features

- Advanced LED technology
- Smart Pyramid Optics (SPO)
- Dedicated lumen package for office application

Application

- General lighting in offices
- Circulation areas

Specifications


Type	RC600B	Ceiling type	Exposed T-bar ceiling Bandrastrer ceiling
------	--------	--------------	--

PowerBalance RC600B

Light source	Philips Fortimo LEDline 3R
Power	LED31S: 40 W (4000 K) LED40S: 52 W (4000 K)
Beam angle	85°
Correlated Color Temperature	3000 or 4000 K
Color Rendering Index	80
Maintenance of lumen output - L90	30,000 hours at 25°C
Maintenance of lumen output - L70	50,000 hours at 25°C
Operating temperature range	+10°C < T

Driver	Built-in
Mains voltage	230 or 240 V / 50 Hz
Dimming	Compatible with DALI controllers
Controls system input	DALI
Options	Lighting controls: Actilume (ACL) Airhandling
Material	Housing: zinc-coated steel Rim: post lacquered Optics: plastic
Color	White (WH)
Maintenance	Optical module sealed for life; no internal cleaning required
Installation	Exposed ceilings: in lay, no brackets needed

Versions

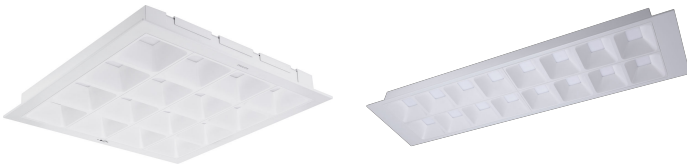

RC600B W30XL120

RC600B W30XL120

Product details



Power Balance G3 RC600B

PowerBalance RC600B

Application Conditions	
Suitable for random switching	Yes
Approval and Application	
Mech. impact protection code	IK03
Ingress protection code	IP20
Operating and Electrical	
Input Voltage	220/240 V
General Information	
Beam angle of light source	- °
CE mark	CE mark
Optical cover/lens type	O
Driver included	Yes
ENEC mark	-
Flammability mark	NO
Glow-wire test	650/30
Light source replaceable	No
Number of gear units	1 unit
Optic type	100
Initial Performance (IEC Compliant)	
Initial chromaticity	SDCM<4
Init. Colour rendering index	>80
Luminous flux tolerance	+/-10%
Mechanical and Housing	
Colour	White

Application Conditions

Order Code	Full Product Name	Ambient temperature range	Maximum dimming level
911401514241	RC600B LED40S/840 POE W60L60 MA	0 to +40 °C	20%
911401897499	RC600B LED30S/840 PSU W60L60 GM	-20 to +40 °C	Not applicable
911401898099	RC600B LED30S/840 PSD W60L60 GM	-20 to +40 °C	1%
911401898899	RC600B LED40S/840 PSU W60L60 GM	-20 to +40 °C	Not applicable
911401898999	RC600B LED40S/865 PSD W60L60 GM	-20 to +40 °C	1%
911401899099	RC600B LED40S/840 PSD W60L60 GM	-20 to +40 °C	1%
911401899199	RC600B LED40S/865 PSU W60L60 GM	-20 to +40 °C	Not applicable
911401899499	RC600B LED40S/840 PSD ACW W60L60 GM	0 to +40 °C	1%
911401897999	RC600B LED30S/840 PSU W30L120 GM	-20 to +40 °C	Not applicable
911401898299	RC600B LED40S/840 PSD W30L120 GM	-20 to +40 °C	1%
911401898399	RC600B LED40S/865 PSU W30L120 GM	-20 to +40 °C	Not applicable
911401898599	RC600B LED40S/840 PSU W30L120 GM	-20 to +40 °C	Not applicable
911401898799	RC600B LED40S/865 PSD W30L120 GM	-20 to +40 °C	1%
911401899799	RC600B LED40S/840 PSD ACW W30L120 GM	0 to +40 °C	1%

Controls and Dimming

Order Code	Full Product Name	Dimmable	Order Code	Full Product Name	Dimmable
911401514241	RC600B LED40S/840 POE W60L60 MA	Yes	911401899499	RC600B LED40S/840 PSD ACW W60L60 GM	Yes
911401897499	RC600B LED30S/840 PSU W60L60 GM	No	911401897999	RC600B LED30S/840 PSU W30L120 GM	No
911401898099	RC600B LED30S/840 PSD W60L60 GM	Yes	911401898299	RC600B LED40S/840 PSD W30L120 GM	Yes
911401898899	RC600B LED40S/840 PSU W60L60 GM	No	911401898399	RC600B LED40S/865 PSU W30L120 GM	No
911401898999	RC600B LED40S/865 PSD W60L60 GM	Yes	911401898599	RC600B LED40S/840 PSU W30L120 GM	No
911401899099	RC600B LED40S/840 PSD W60L60 GM	Yes	911401898799	RC600B LED40S/865 PSD W30L120 GM	Yes
911401899199	RC600B LED40S/865 PSU W60L60 GM	No	911401899799	RC600B LED40S/840 PSD ACW W30L120 GM	Yes

General Information

Order Code	Full Product Name	Protection class IEC	Order Code	Full Product Name	Protection class IEC
911401514241	RC600B LED40S/840 POE W60L60 MA	Safety class III (III)	911401899499	RC600B LED40S/840 PSD ACW W60L60 GM	Safety class I (I)
911401897499	RC600B LED30S/840 PSU W60L60 GM	Safety class I (I)	911401897999	RC600B LED30S/840 PSU W30L120 GM	Safety class I (I)
911401898099	RC600B LED30S/840 PSD W60L60 GM	Safety class I (I)	911401898299	RC600B LED40S/840 PSD W30L120 GM	Safety class I (I)
911401898899	RC600B LED40S/840 PSU W60L60 GM	Safety class I (I)	911401898399	RC600B LED40S/865 PSU W30L120 GM	Safety class I (I)
911401898999	RC600B LED40S/865 PSD W60L60 GM	Safety class I (I)	911401898599	RC600B LED40S/840 PSU W30L120 GM	Safety class I (I)
911401899099	RC600B LED40S/840 PSD W60L60 GM	Safety class I (I)	911401898799	RC600B LED40S/865 PSD W30L120 GM	Safety class I (I)
911401899199	RC600B LED40S/865 PSU W60L60 GM	Safety class I (I)	911401899799	RC600B LED40S/840 PSD ACW W30L120 GM	Safety class I (I)

Initial Performance (IEC Compliant)

PowerBalance RC600B

Order Code	Full Product Name	Init. Corr. Colour Temperature	Initial LED luminaire efficacy	Initial luminous flux	Initial input power
911401514241	RC600B LED40S/840 POE W60L60 MA	4000 K	117.14 lm/W	4100 lm	35 W
911401897499	RC600B LED30S/840 PSU W60L60 GM	4000 K	129.17 lm/W	3100 lm	24 W
911401898099	RC600B LED30S/840 PSD W60L60 GM	4000 K	129.17 lm/W	3100 lm	24 W
911401898899	RC600B LED40S/840 PSU W60L60 GM	4000 K	125 lm/W	4000 lm	32 W
911401898999	RC600B LED40S/865 PSD W60L60 GM	6500 K	125 lm/W	4000 lm	32 W
911401899099	RC600B LED40S/840 PSD W60L60 GM	4000 K	125 lm/W	4000 lm	32 W
911401899199	RC600B LED40S/865 PSU W60L60 GM	6500 K	125 lm/W	4000 lm	32 W
911401899499	RC600B LED40S/840	4000 K	160 lm/W	4000 lm	25 W

Order Code	Full Product Name	Init. Corr. Colour Temperature	Initial LED luminaire efficacy	Initial luminous flux	Initial input power
	PSD ACW W60L60 GM				
911401897999	RC600B LED30S/840 PSU W30L120 GM	4000 K	129.17 lm/W	3100 lm	24 W
911401898299	RC600B LED40S/840 PSD W30L120 GM	4000 K	125 lm/W	4000 lm	32 W
911401898399	RC600B LED40S/865 PSU W30L120 GM	6500 K	125 lm/W	4000 lm	32 W
911401898599	RC600B LED40S/840 PSU W30L120 GM	4000 K	125 lm/W	4000 lm	32 W
911401898799	RC600B LED40S/865 PSD W30L120 GM	6500 K	125 lm/W	4000 lm	32 W
911401899799	RC600B LED40S/840 PSD ACW W30L120 GM	4000 K	160 lm/W	4000 lm	25 W

